


# MAVER M1302

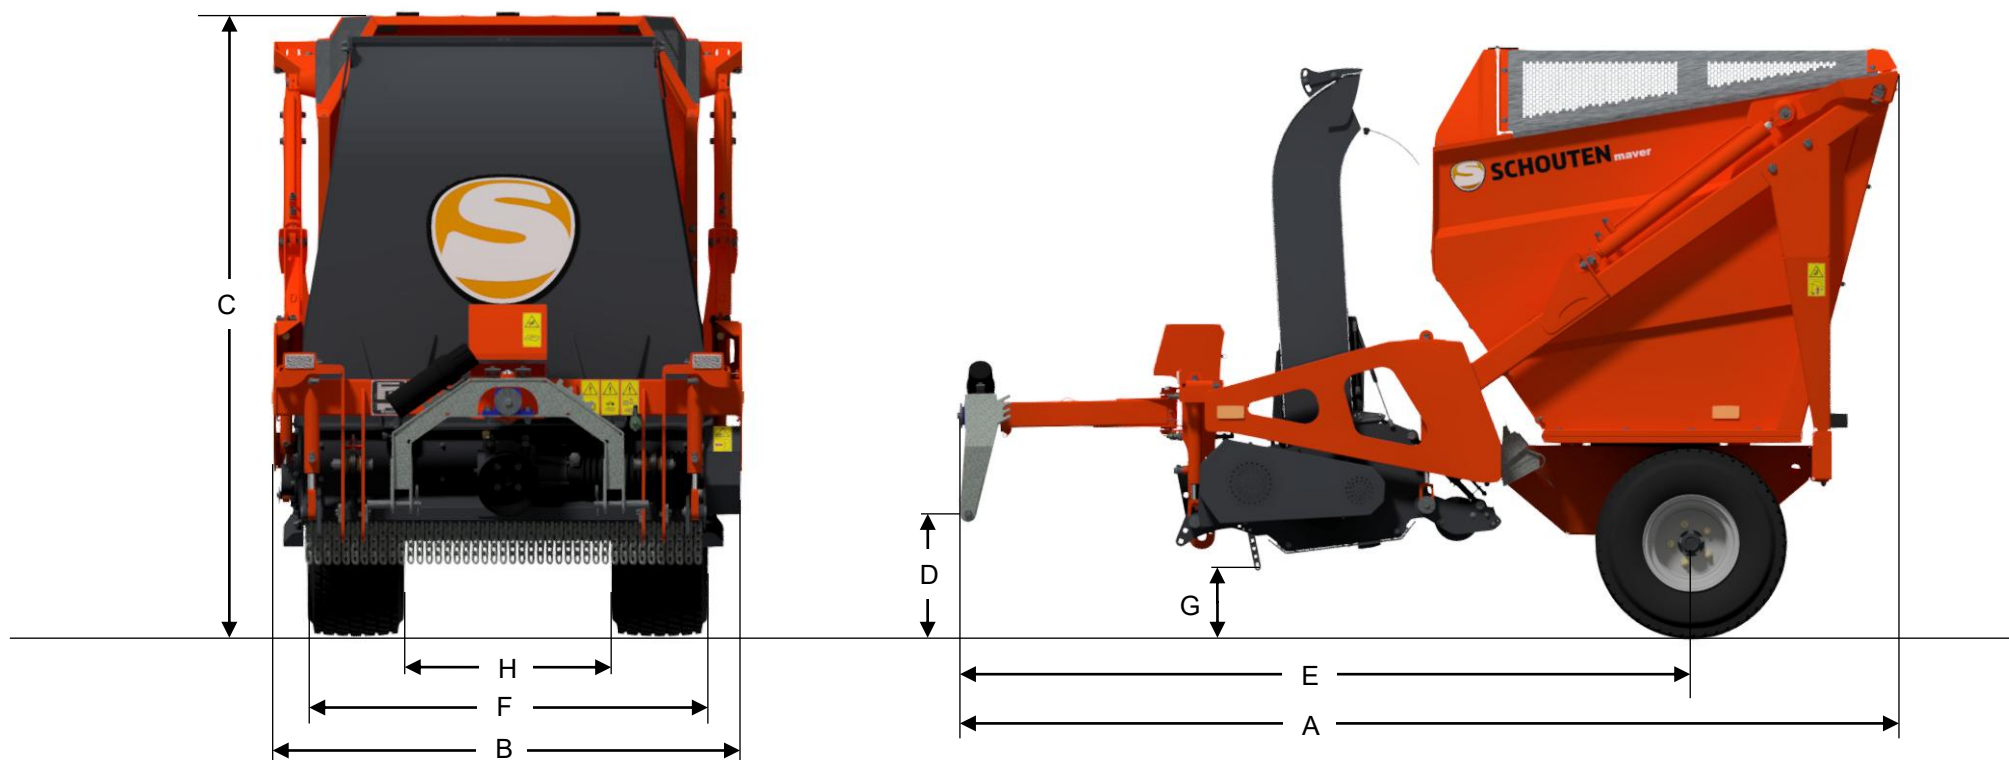

## DIMENSIONS


|   |              |         |
|---|--------------|---------|
| A | LENGTH       | 3290 MM |
| B | WIDTH        | 1545 MM |
| C | HEIGHT       | 2020 MM |
| D | HITCH HEIGHT | 390 MM  |

|   |                           |         |
|---|---------------------------|---------|
| E | DISTANCE HITCH EYE – AXLE | 2510 MM |
| F | WORKING WIDTH             | 1270 MM |
| G | FRAME CLEARANCE           | 250 MM  |
| H | HITCH WIDTH               | 700 MM  |

# MAVER M1302

## MACHINE INFORMATION

|                                    |                      |
|------------------------------------|----------------------|
| TYPE                               | M1302                |
| WEIGHT                             | 1150 KG              |
| HITCH TYPE                         | CAT I / II HEF       |
| BIN CAPACITY                       | 2 M³                 |
| NUMBER OF TRACTOR VALVES           | 1X SA / 1X DA        |
| POWER CONNECTION                   | 12VDC                |
| AXLE                               | TVZ 40MM UNBRAKED    |
| CARRYING CAPACITY                  | 1.000 KG             |
| TYRES                              | 26X12.00-12 6PR      |
| MOWING UNIT DRIVE                  | PTO V-BELTS          |
| PTO SPEED                          | 540 RPM              |
| POWER REQUIREMENT                  | 20 HP                |
| WORKING WIDTH                      | 127 CM               |
| DIAMETER MOWING ROTOR              | Ø 200 MM             |
| NUMBER OF MOWING / CHOPPING BLADES | 54L+54R / 108 PIECES |
| NUMBER OF WIND WINGS               | 51 PIECES            |
| ROTORSPEED                         | 2380 RPM             |
| DIAMETER REAR ROLLER               | Ø 160 MM             |
| SCARIFYING                         | OPTIONAL             |
| NUMBER OF SCARIFYING BLADES        | 54 PIECES            |
| SCARIFYING DISTANCE – MAX. DEPTH   | 36 MM - 4 MM         |

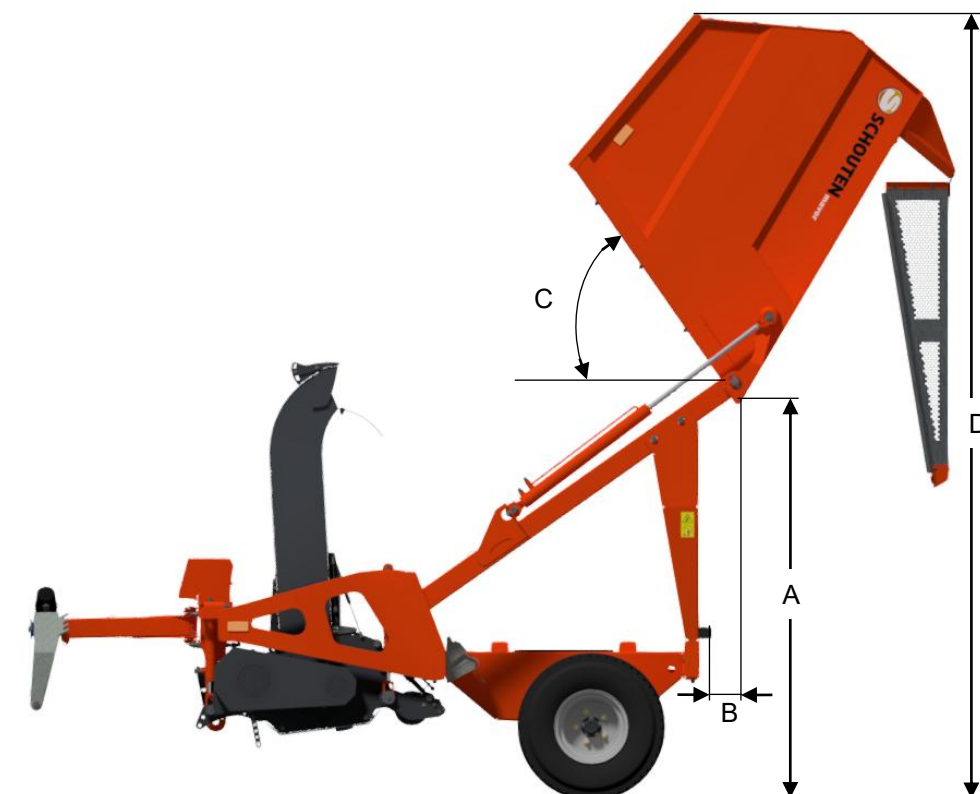

## DIMENSIONS TIPPING POSITION

|                        |         |
|------------------------|---------|
| A MAX. TIPPING HEIGHT  | 1790 MM |
| B DISTANCE BIN – FRAME | 150 MM  |
| C ANGLE TIPPING BIN    | 55°     |
| D TOTAL HEIGHT         | 3520 MM |